


# Tigerloop® Allowable LIFT and RUN by nozzle size

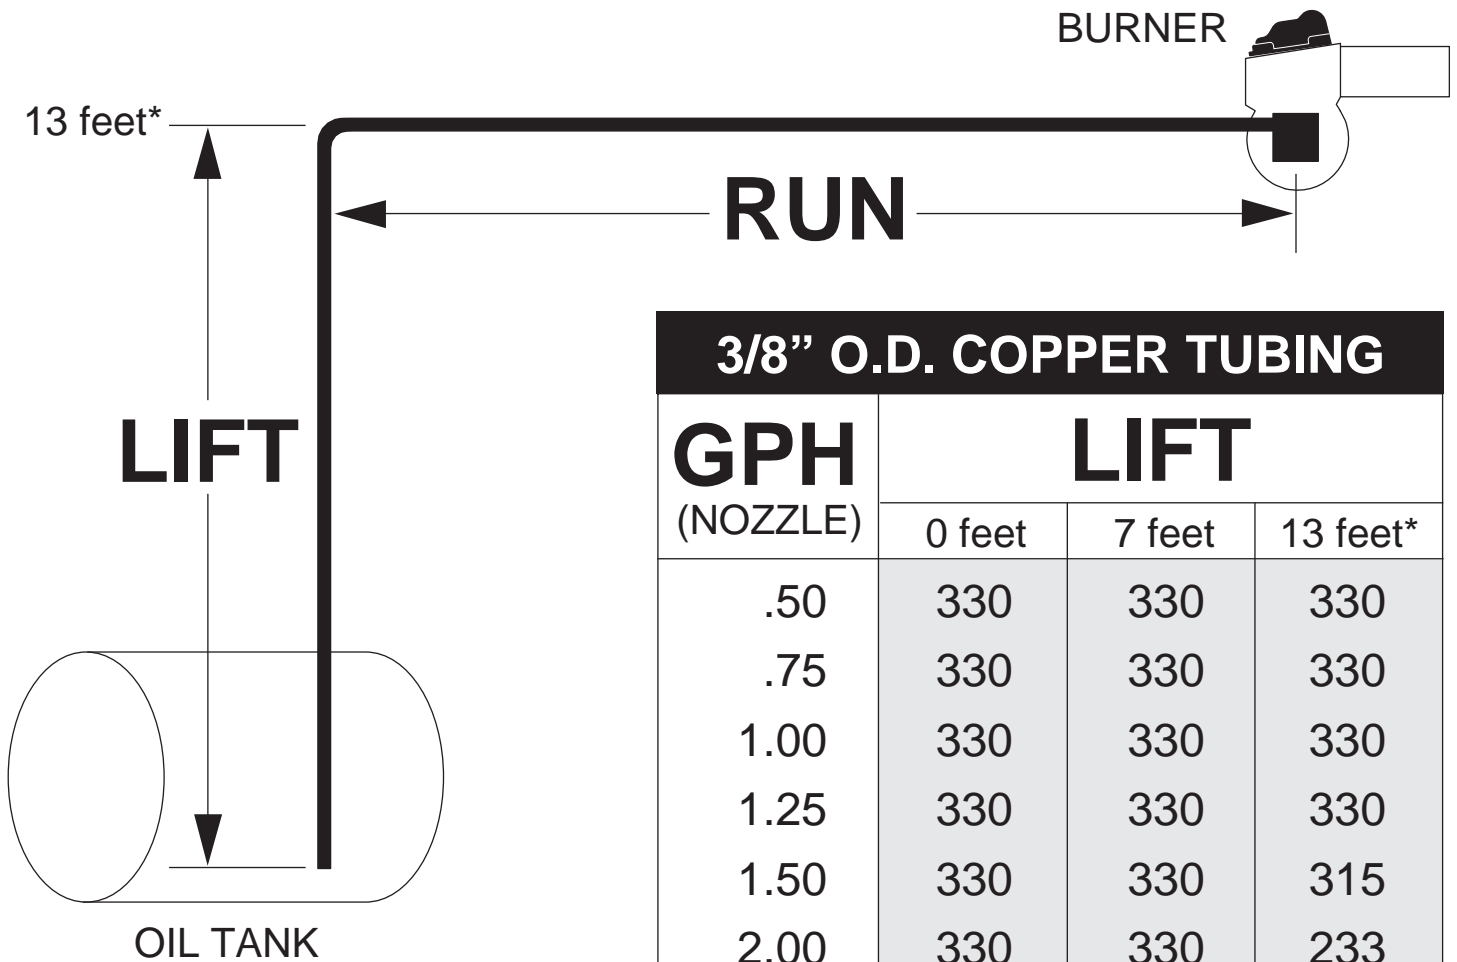

<b>3/8" O.D. COPPER TUBING</b>			
<b>GPH (NOZZLE)</b>	<b>LIFT</b>		
	0 feet	7 feet	13 feet*
.50	330	330	330
.75	330	330	330
1.00	330	330	330
1.25	330	330	330
1.50	330	330	315
2.00	330	330	233
3.00	330	330	151
4.00	330	330	108

Numbers in shaded area are maximum **RUN** in feet

Note: For each nozzle size, using a larger tubing size than shown in these charts may cause priming and air purging problems leading to nuisance lockouts.

<b>1/2" O.D. COPPER TUBING</b>			
<b>GPH (NOZZLE)</b>	<b>LIFT</b>		
	0 feet	7 feet	13 feet*
5.00	330	330	330
10.00	330	330	161
15.00	330	330	105
20.00	330	246	76

\* maximum allowable lift